




# High Performance Double Coated Tapes

9086, 9087, 9088, 9088FL

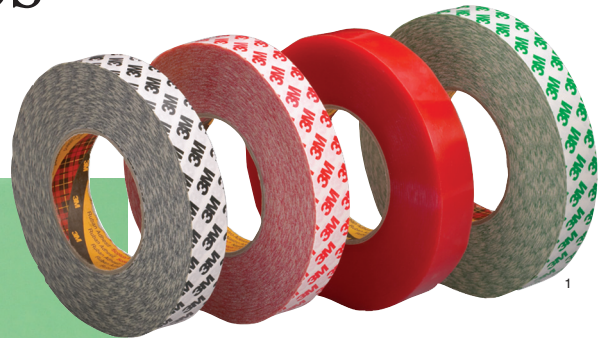

*High tack  
and long-term  
grip on almost  
anything*

*Thick, strong,  
sticky adhesive  
for smooth to  
rough surfaces*

Touch the adhesive on any one of these tapes and you'll feel what's different... it's thicker and stickier than the average thin tape.

#### **High tack**

3M™ High Performance Double Coated Tapes with Adhesive 375 holds tight to bond on contact to almost any high and low surface energy substrate.

For example, bond painted and unpainted surfaces, stainless steel, glass, polycarbonate, polypropylene, ABS, wood, fabric, leather, foam, and more.





#### **Long-term grip**

Bonds are durable with high peel and shear strength, and resistance to UV light, solvents, plasticizers, and high temperatures.

#### **Many applications**

- POP displays
- Metal fabrication
- Sporting equipment
- Signs
- Window blinds
- Plastic extrusions
- Furniture trim
- Packaging
- Nameplates
- Print finishing
- Splicing
- Fabric/Leather

# 3M™ High Performance Double Coated Tapes 9086, 9087, 9088, 9088FL

Adhesive Family	Product Number	Tape Thickness w/o liner Mils (mm)	Carrier Type*	Liner Type	Description	Temperature Resistance		Solvent Resistance	Relative Adhesion		
						Minutes Hours	Days Weeks		HSE	LSE	
375	9086	7.5 mils (0.19 mm)	Tissue	White paper (Glassine) with black 3M logo	• Easy tearing, easy handling	248°F (120°C)	185°F (85°C)	Good	High	Medium	
	9087	10.2 mils (0.26 mm)	PVC	White paper (Glassine) with green 3M logo	• Thick adhesive to bond rough surfaces	185°F (85°C)	158°F (70°C)				
	9088	8.3 mils (0.21 mm)	Polyester	White paper (Glassine) with red 3M logo	• High temperature resistance with paper liner	300°F (150°C)	200°F (93°C)				
	9088FL	8.3 mils (0.21 mm)	Polyester	Red polypropylene film with no print	• High temperature resistance with film liner	300°F (150°C)	200°F (93°C)				

Note: The technical information and data in this chart should be considered representative or typical only and should not be used for specification purposes.

\* Color-coded for easy work site recognition

**Product Use:** All statements, technical information and recommendations contained in this document are based upon tests or experience that 3M believes are reliable. However, many factors beyond 3M's control can affect the use and performance of a 3M product in a particular application, including the conditions under which the product is used and the time and environmental conditions in which the product is expected to perform. Since these factors are uniquely within the user's knowledge and control, it is essential that the user evaluate the 3M product to determine whether it is fit for a particular purpose and suitable for the user's method of application.

**Warranty and Limited Remedy:** Unless stated otherwise in 3M's product literature, packaging inserts or product packaging for individual products, 3M warrants that each 3M product meets the applicable specifications at the time 3M ships the product. Individual products may have additional or different warranties as stated on product literature, package inserts or product packages. **3M MAKES NO OTHER WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE OR ANY IMPLIED WARRANTY ARISING OUT OF A COURSE OF DEALING, CUSTOM OR USAGE OF TRADE.** User is responsible for determining whether the 3M product is fit for a particular purpose and suitable for user's application. If the 3M product is defective within the warranty period, your exclusive remedy and 3M's and seller's sole obligation will be, at 3M's option, to replace the product or refund the purchase price.

**Limitation of Liability:** Except where prohibited by law, 3M and seller will not be liable for any loss or damage arising from the 3M product, whether direct, indirect, special, incidental or consequential, regardless of the legal theory asserted, including warranty, contract, negligence or strict liability.



## Industrial and Transportation Business Industrial Adhesives and Tapes Division

Customer Response Center  
900 Bush Avenue,  
Building 21-1W-10  
St. Paul, MN 55144-1000  
1-800-362-3550  
[www.3M.com/industrial](http://www.3M.com/industrial)

Printed in U.S.A.  
Blgr. 7030611  
© 3M 2006 70-0709-3994-0