

Technical Data – CBR155/839

Embossed copper foil coated with conductive Acrylic adhesive.



Application


1. Shielding of signal cable
2. Repair for shielding signal cable or FCC
3. Blinding the end of knitted wire mesh of shielding cable
4. For shield leaking or invading electromagnetic waves
5. Tape for EMR / RFI shielding

Product description

- Copper foil conductive adhesive tape
- Heat / Cold resistant
- Available in lengths of 25m and 33m
- Good conductive properties

Construction

- Copper Foil (38µm/.001in)
- Conductive Acrylic Adhesive
- Release liner

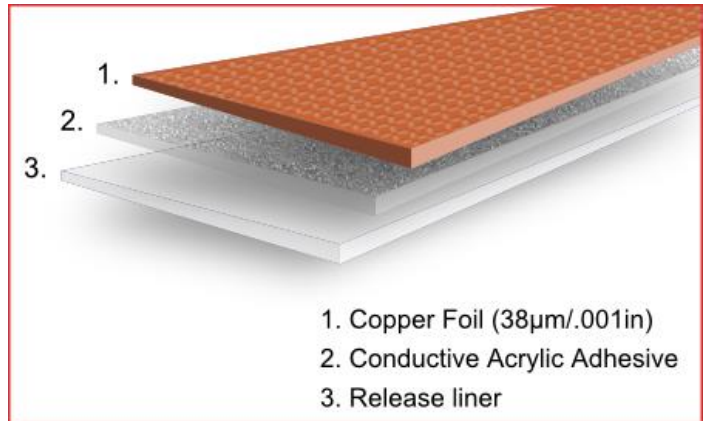

Technical data

Item	Unit		Spec.	
Total thickness	µm	Inch	95µm	.004
Peel Strength	g/inch	lb/inch	900	1.98
Temperature Resistance	°C	°F	130	266
Electrical Resistance	Ω	-	0.5	-
Elongation	%	-	8	-

Note

Unless stated otherwise all values given are average. All of the tapes in our range should be thoroughly tested on the substrates in the particular application they are intended for. SOLBI-MURAL S.L. will not be responsible for product failure unless full testing has been completed. The customer has to decide on the tapes suitability for the intended application.